



# HP

*HPE6-A81*

*Aruba Certified ClearPass Expert Written Exam*

## Questions & Answers PDF

**For More Information:**

**<https://www.certswarrior.com/>**

## Features:

- 90 Days Free Updates
- 30 Days Money Back Guarantee
- Instant Download Once Purchased
- 24/7 Online Chat Support
- Its Latest Version

# Latest Version: 6.0

## Question: 1


You are deploying Clear Pass Policy Manager with Guest functionality for a customer with multiple Aruba Networks Mobility Controllers. The customer wants to avoid SSL errors during guest access but due to company security policy cannot use a wildcard certificate on ClearPass or the Controllers. What is the most efficient way to configure the customer's guest solution? (Select two.)

- A. Install the same public certificate on all Controllers with the common name "controller.{company domain}"
- B. Build multiple Web Login pages with vendor settings configured for each controller
- C. Build one Web Login page with vendor settings for captiveportal-controller (company domain)
- D. Build one Web Login page with vendor settings for controller (company domain)
- E. Install multiple public certificates with a different Common Name on each controller

**Answer: DE**

## Question: 2

Refer to the exhibit.

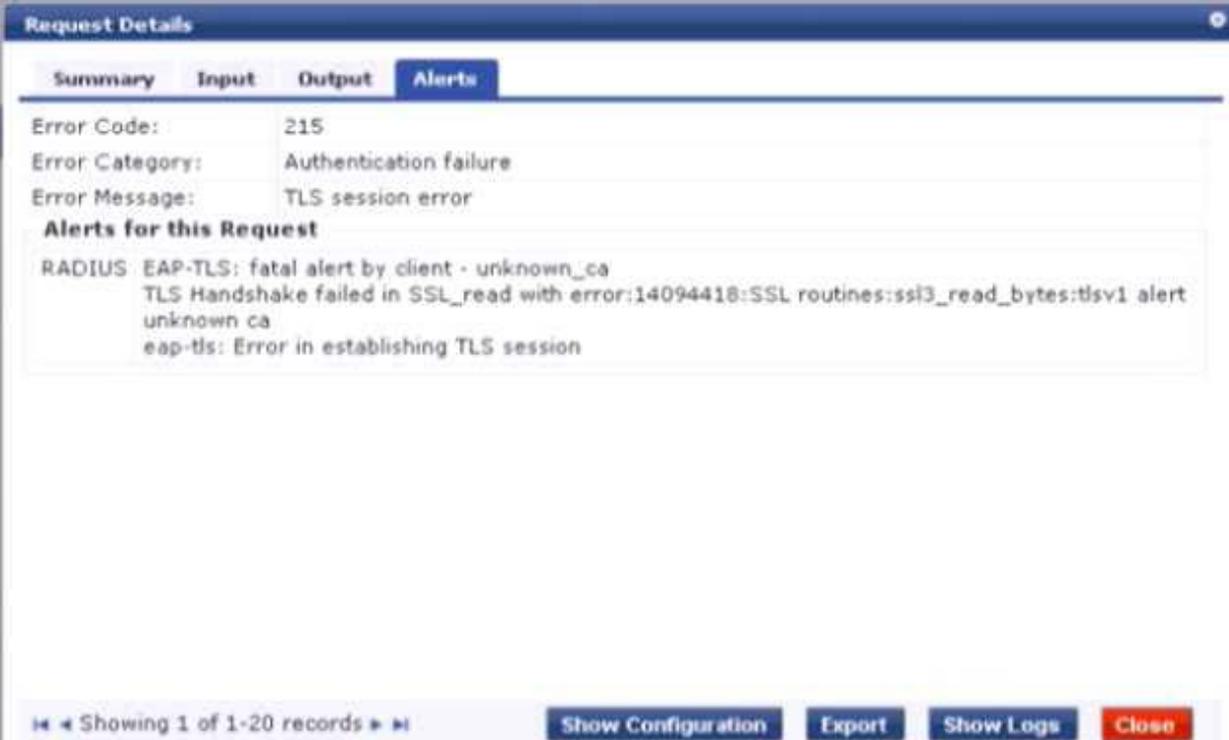

The screenshot shows a 'Request Details' window with tabs for Summary, Input, Output, and Alerts. The Alerts tab is active, displaying the following information:

Error Code:	215
Error Category:	Authentication failure
Error Message:	TLS session error

**Alerts for this Request**

```
RADIUS: EAP-TLS: fatal alert by client - unknown_ca
TLS Handshake failed in SSL_read with error:14094418:SSL routines:ssl3_read_bytes:tlsv1 alert
unknown ca
eap-tls: Error in establishing TLS session
```

At the bottom of the window, there is a status bar showing 'Showing 1 of 1-20 records' and buttons for 'Show Configuration', 'Export', 'Show Logs', and 'Close'.

A customer has configured Onboard in a cluster with two nodes. All devices were onboarded in the network through node1 but those clients fail to authenticate through node2 with the error shown What steps would you suggest to make provisioning and authentication work across the entire cluster? (Select three)

- A. Configure the Network Settings in Onboard to trust the Policy Manager EAP certificate.
- B. Have all of the BYOO clients disconnect and reconnect to the network.
- C. Configure the Onboard Root CA to trust the Policy Manager EAP certificate root.
- D. Make sure that the EAP certificates on both nodes are issued by one common root Certificate Authority (CA).

**Answer: BCD**

### Question: 3

Refer to the exhibit.

The screenshot shows the 'Customize Self-Registration' configuration page. Under the 'Login' section, the following settings are visible:  
- Enabled:  Enable guest login to a Network Access Server  
- \* Vendor Settings: Aruba Networks  
- Login Method: Controller-initiated — Guest browser performs HTTP form submit  
- \* IP Address: securelogin.arubanetworks.com  
- Secure Login: Secure login using HTTPS  
- Dynamic Address:  The controller will send the IP to submit credentials  
- Security Hash: Do not check — login will always be permitted  
- Default Destination:   
 \* Default URL:   
- Override Destination:  Force default destination for all clients

A customer with multiple Aruba Controllers has just installed a new certificate for ".customerdomain.com- on all Aruba Controllers While testing the existing guest Self-Registration page the customer noticed that the logins are failing While troubleshooting they are finding no entries in the Event Viewer or Access Tracker for the tests Suspecting that the Aruba Controllers may not be properly posting the credentials from the guest browser, they open the NAS Vendor Settings for the Guest Self-Registration Page.

- A. Add PTR records on the DNS server for "securelogin arubanetworks.com".

- 
- B. Change the "Secure Login" field to "Use Vendor Default".
  - C. Change the "IP Address" field to "securelogin.customerdomain.com"
  - D. Change the "IP Address" field to "captiveportal-login.customerdomain.com".

**Answer: D**

### Question: 4

Refer to the exhibit.

Configuration > Services > Edit - Health-Check

## Services - Health-Check

**Summary** Service Roles **Enforcement**

Use Cached Results:  Use cached Roles and Posture attributes from previous sessions

Enforcement Policy: T-3-OnGuard Modify Add New Enforcement Policy

**Enforcement Policy Details**

Description:

Default Profile: [ArubaOS Wireless - Terminate Session]

Rules Evaluation Algorithm: first-applicable

Conditions	Enforcement Profiles
1. (Tips:Posture <b>HEALTHY</b> (0))	T4-Healthy, [ArubaOS Wireless - Terminate Session]
2. (Tips:Posture <b>QUARANTINE</b> (20))	T-4-Unhealthy, [ArubaOS Wireless - Terminate Session]

Configuration > Posture > Posture Policies > Edit - Windows

## Posture Policies - Windows

**Summary** Policy **Posture Plugins** Rules

Select one/more plugins:

Plugin Name	Plugin Configuration	Status
<input checked="" type="checkbox"/> ClearPass Windows Universal System Health Validator	<span>Configure</span> <span>View</span>	Configured
<input type="checkbox"/> Windows System Health Validator	<span>Configure</span> <span>View</span>	-
<input type="checkbox"/> Windows Security Health Validator	<span>Configure</span> <span>View</span>	-

Configuration > Posture > Posture Policies > Edit - Windows

## Posture Policies - Windows

**Summary** Policy **Posture Plugins** **Rules**

Rules Evaluation Algorithm: First applicable

Conditions	Posture Token
1. Passes all SHV checks - ClearPass Windows Universal System Health Validator	HEALTHY
2. Fails one or more SHV checks - ClearPass Windows Universal System Health Validator	QUARANTINE

Add Rule Move Up ↑ Move Down ↓ Edit Rule Remove Rule

**Request Details**

**Summary** Input Output

Login Status: ACCEPT

Session Identifier: W0000002e-01-5d5ce4f4

Date and Time: Aug 21, 2019 08:30:13 CEST

End-Host Identifier: 7c5cf8cb1f0b

Username: 7c5cf8cb1f0b

Access Device IP/Port: -

System Posture Status: UNKNOWN (100)

**Policies Used -**

Service: Health-Check

Authentication Method: Not applicable

Authentication Source: -

Authorization Source: -

Roles: -

Enforcement Profiles: [ArubaOS Wireless - Terminate Session]

Service Monitor Mode: Disabled

Showing 6 of 1-173 records Change Status Show Configuration Export Show Logs Close

ClearPass OnGuard 6.7.10.109323

**Health Status: Collecting health information**

Connection Details Diagnostics Settings

Health Status: Not Known Logout Stay

INFO:Response processed

Health Check failed. Invalid or Empty response received from server.

What could be causing the error message received on the OnGuard client?

- A. The Service Selection Rules for the service are not configured correctly
- B. The Health-Check service does not have Posture Compliance option enabled

- C. The client's OnGuard Agent has not been configured with the correct Policy Manager Zone.
- D. There is a firewall policy not allowing the OnGuard Agent to connect to ClearPass

**Answer: A**

### Question: 5

Refer to the exhibit.



*Please login to the network using your username and password.*

*To create a new account click [Create Account](#).*

A screenshot of a web-based login form titled "Login". The form has a blue header bar with the word "Login" in white. Below the header, there are three input fields: "Username:" with the value "sccx@exam.com" (highlighted in blue), "Password:" with a masked password of ten black dots, and "Terms:" with a checked checkbox and the text "I accept the terms of use". A red error message "Invalid username or password" is displayed below the username field. At the bottom of the form is a blue "Log In" button.

*Contact a staff member if you are experiencing difficulty logging in.*

Contact a staff member if you are experiencing difficulty logging in.

The screenshot displays a 'Request Details' window with a dark blue header and a light blue background. It features four tabs: 'Summary' (selected), 'Input', 'Output', and 'Alerts'. The main content area shows the following details:

Login Status:	REJECT
Session Identifier:	W0000000c-01-5d88e82b
Date and Time:	Sep 23, 2019 11:43:40 EDT
End-Host Identifier:	-
Username:	accx@exam.com
Access Device IP/Port:	-:-
System Posture Status:	-

Below this is a section titled 'Policies Used -' with a grey background, containing the following information:

Service:	-
Authentication Method:	Not applicable
Authentication Source:	-
Authorization Source:	-
Roles:	-
Enforcement Profiles:	-
Service Monitor Mode:	-
Online Status:	Not Available

At the bottom of the window, there is a navigation bar with the text 'Showing 1 of 1-16 records', a 'Show Configuration' button, an 'Export' button, a 'Show Logs' button, and a red 'Close' button.

**Request Details**

Summary Input Output Alerts

Error Code: 204  
 Error Category: Authentication failure  
 Error Message: Failed to classify request to service

**Alerts for this Request**

WebAuthService: ServiceClassification failed (No service matched)

Configuration > Services > Edit - ACCX Guest Access

Services - ACCX Guest Access

Summary Service Authentication Roles Enforcement

**Service:**

Name: ACCX Guest Access  
 Description: To authenticate guest users logging in via captive portal. Guests must re-authenticate after their session ends.  
 Type: RADIUS Enforcement ( Generic )  
 Status: Enabled  
 Monitor Mode: Disabled  
 More Options: -

**Service Rule**

Match ALL of the following conditions:

	Type	Name	Operator	Value
1.	Radius:IETF	Calling-Station-Id	EXISTS	
2.	Connection	Client-Mac-Address	NOT_EQUALS	%{Radius:IETF:User-Name}
3.	Radius:Aruba	Aruba-Essid-Name	EQUALS	guest-labtest

**Authentication:**

Authentication Methods: 1. [PAP]  
 2. [MSCHAP]  
 3. [CHAP]  
 Authentication Sources: [Guest User Repository]  
 Strip Username Rules: -  
 Service Certificate: -

**Roles:**

Role Mapping Policy: [Guest Roles]

**Enforcement:**

Use Cached Results: Disabled  
 Enforcement Policy: Accx Guest Access Enforcement Policy

Home > Configuration > Pages > Web Logins

**Web Login (ACCX\_LabTest)**

Use this form to make changes to the Web Login **ACCX\_LabTest**.

## Web Login (ACCX\_LabTest)

Use this form to make changes to the Web Login *ACCX\_LabTest*.

Web Login Editor	
* Name:	<input type="text" value="ACCX_LabTest"/> Enter a name for this web login page.
Page Name:	<input type="text" value="ACCX_TestPage"/> Enter a page name for this web login. The web login will be accessible from "/guest/page_name.php".
Description:	<input type="text"/> Comments or descriptive text about the web login.
* Vendor Settings:	<input type="text" value="Aruba Networks"/> Select a predefined group of settings suitable for standard network configurations.
Login Method:	<input type="text" value="Controller-initiated — Guest browser performs HTTP form submit"/> Select how the user's network login will be handled. Server-initiated logins require the user's MAC address to be available, usually from the captive portal redirection process.
* Address:	<input type="text" value="securelogin.arubanetworks.com"/> Enter the IP address or hostname of the vendor's product here.
Secure Login:	<input type="text" value="Use vendor default"/>
<b>Page Redirect</b> Options for specifying parameters passed in the initial redirect.	
Security Hash:	<input type="text" value="Do not check — login will always be permitted"/> Select the level of checking to apply to URL parameters passed to the web login page. Use this option to detect when URL parameters have been modified by the user, for example their MAC address.
<b>Login Form</b> Options for specifying the behaviour and content of the login form.	
Authentication:	<input type="text" value="Credentials — Require a username and password"/> Select the authentication requirement. Access Code requires a single code (username) to be entered. Anonymous allows a blank form requiring just the terms or a Log In button. A pre-existing account is required. Auto is similar to anonymous but the page is automatically submitted. Access Code and Anonymous require the account to have the Username Authentication field set.
Prevent CNA:	<input type="checkbox"/> Enable bypassing the Apple Captive Network Assistant The Apple Captive Network Assistant (CNA) is the pop-up browser shown when joining a network that has a captive portal. Note that this option may not work with all vendors, depending on how the captive portal is implemented.
Custom Form:	<input type="checkbox"/> Provide a custom login form If selected, you must supply your own HTML login form in the Header or Footer HTML areas.
Custom Labels:	<input type="checkbox"/> Override the default labels and error messages If selected, you will be able to alter labels and error messages for the current login form.
* Pre-Auth Check:	<input type="text" value="App Authentication — check using Aruba Application Authentication"/> Select how the username and password should be checked before proceeding to the NAS authentication.
Terms:	<input type="checkbox"/> Require a Terms and Conditions confirmation If checked, the user will be forced to accept a Terms and Conditions checkbox.
Prevent CNA:	<input type="checkbox"/> Enable bypassing the Apple Captive Network Assistant The Apple Captive Network Assistant (CNA) is the pop-up browser shown when joining a network that has a captive portal. Note that this option may not work with all vendors, depending on how the captive portal is implemented.
Custom Form:	<input type="checkbox"/> Provide a custom login form If selected, you must supply your own HTML login form in the Header or Footer HTML areas.
Custom Labels:	<input type="checkbox"/> Override the default labels and error messages If selected, you will be able to alter labels and error messages for the current login form.
* Pre-Auth Check:	<input type="text" value="App Authentication — check using Aruba Application Authentication"/> Select how the username and password should be checked before proceeding to the NAS authentication.
Terms:	<input type="checkbox"/> Require a Terms and Conditions confirmation If checked, the user will be forced to accept a Terms and Conditions checkbox.

A year ago, your customer deployed an Aruba ClearPass Policy Manager Server for a Guest SSID hosted in an IAP Cluster. The customer just created a new Web Login Page for the Guest SSID. Even though the previous Web Login page worked, tests with the new Web Login Page are failing, and the customer has forwarded you the above screenshots.

What recommendation would you give the customer to fix the issue?

- 
- A. The customer should reset the password for the username accxCdlexam.com using Guest Manage Accounts.
  - B. The service type configured is not correct. The Guest authentication should be an Application authentication type of service.
  - C. The Address filed under the WebLogin Vendor settings is not configured correctly. It should be set to instant, Aruba networks com,
  - D. The WebLogin Pre-Auth Check is set to Aruba Application Authentication which requires a separate application service on the policy manager

**Answer: C**



**CERTSWARRIOR**

**FULL PRODUCT INCLUDES:**

Money Back Guarantee



Instant Download after Purchase



90 Days Free Updates



PDF Format Digital Download



24/7 Live Chat Support



Latest Syllabus Updates



For More Information – Visit link below:

**<http://www.certswarrior.com>**

Discount Coupon Code:

**CERTSWARRIOR10**

We Accept

**PayPal**